
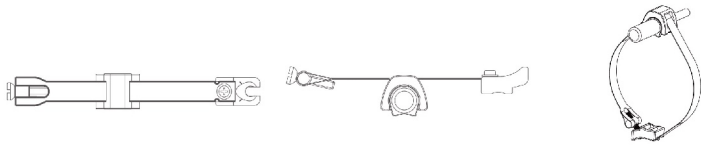


Cylinder cylinder type	optional switch	Matching fixture
Standard round cylinder 	DFGG AG-49/AG-59 AG-26/AG-27/DFGH	PBN fixing straps PBL fixing straps PBN fixing steel belt


## PBL fixing straps

- PBL-Sxx AG-49/AG-59 series dedicated, fixed switch on  $\Phi 6\sim\Phi 63$  rod cylinder (stainless steel cylinder)
- PBL-Axx AG-49/AG-59 series dedicated, fixed switch on  $\Phi 16\sim\Phi 63$  rod cylinder (aluminum alloy cylinder)
- PBL-01  $\Phi 6\sim\Phi 63$  round cylinder fixing steel belt
- PBL-02  $\Phi 6\sim\Phi 125$  round cylinder fixing steel belt
- PBL-03  $\Phi 6\sim\Phi 145$  round cylinder fixing steel belt




## PCE Fixtures

AG-49/AG-59 series dedicated, fixed switch below  $\Phi 8$  pull rod cylinder

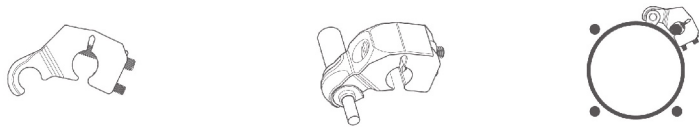

## PCD Fixtures

AG-49/AG-59 series dedicated, fixed switch below  $\Phi 250$  pull rod cylinder (Exclude  $\Phi 250$ )

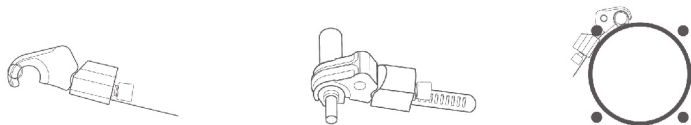

Product Size (mm)	14.5*11*13
Color	GREEN
Product Weight	15g
Material	Engineering Plastics &Stainless Steel
Ambient Temperature	-10°C~70°C
Environmental Grade	RoHS/REACH
Fire-proof Level	UL94V0
Suitable Sensor	AG-49/AG-59
Application Scenarios	Round Cylinder